

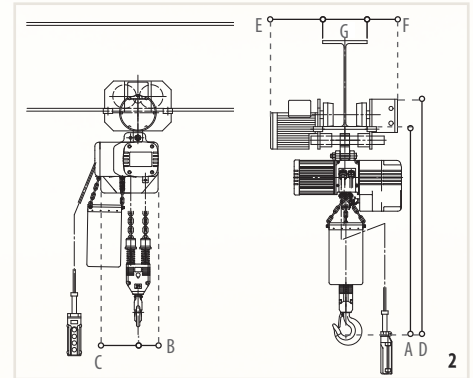


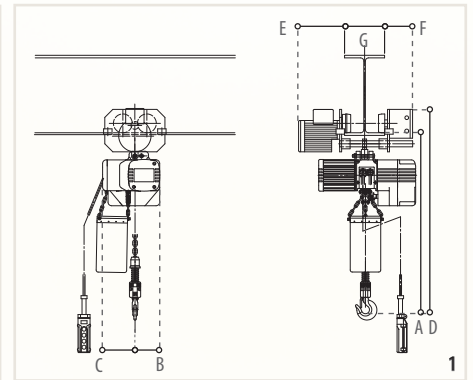

## Takels met elektrische loopkat / Motorized trolley type chain hoists

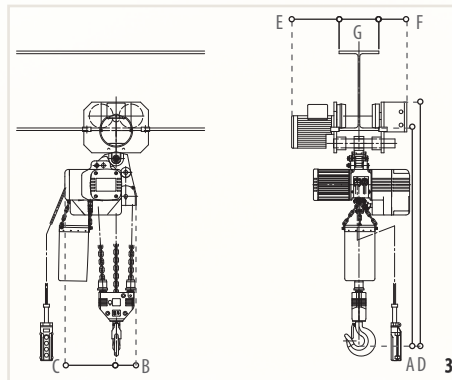

### Eigenschappen

- » Overlastbeveiliging.
- » IP54.
- » Standaard voltage: 400v/50Hz  
Andere op aanvraag.

### Features

- » Overload protected.
- » IP54.
- » Standard Voltage: 400v/50Hz  
Others upon request.

model / model	WLL / WLL ton	frame / frame type / size	snelheid / speed 50 Hz m-min.	snelheid / speed 60 Hz m-min.	vermogen / output PK/CV/HP	figuur ref. / ref. fig.	parten / chain falls	gewicht / net weight kg.
DTD.025.001	0.25	C 015A	8	9.6	1.25	1	1	80
DTD.025.003	0.25	C 015A	8 - 2.7	9.6 - 3.2	1.25 - 0.42	1	1	88
DTD.151.001	0.5	C 015A	8	9.6	1.25	1	1	88
DTD.151.003	0.5	C 015A	8 - 2.7	9.6 - 3.2	1.25 - 0.42	1	1	88
DTD.30F.001	1.0	C 015B	4	4.8	1.25	1	1	80
DTD.30F.003	1.0	C 015B	4 - 1.3	4.8 - 1.6	1.25 - 0.42	1	1	88
DTD.301.001	1.0	C 030A	8	9.6	2.5	1	1	91
DTD.301.003	1.0	C 030A	8 - 2.7	9.6 - 3.2	2.5 - 0.84	1	1	102
DTD.451.001	1.5	C 050 A	9.5	11.4	5.0	1	1	100
DTD.451.003	1.5	C 050 A	9.5 - 3.2	11.4 - 3.8	5.0 - 1.67	1	1	100
DTD.302.001	2.0	C 030A	4	4.8	2.5	2	2	111
DTD.302.003	2.0	C 030 A	4 - 1.3	4.8 - 1.6	2.5 - 0.84	2	2	100
DTD.601.001	2.0	C 060 A	8	9.6	5.0	1	1	111
DTD.601.003	2.0	C 060 A	8 - 2.7	9.6 - 3.2	5.0 - 1.67	1	1	161
DTD.751.001	2.5	C 075 A	7.3	8.8	6.0	1	1	180
DTD.751.003	2.5	C 075 A	7.3 - 2.4	8.8 - 2.9	6.0 - 2.0	1	1	190
DTD.303.001	3.0	C 030 A	2.7	3.3	2.5	3	3	121
DTD.303.003	3.0	C 030 A	2.7 - 0.9	3.3 - 1.1	2.5 - 0.84	3	3	132
DTD.452.001	3.0	C 050 A	4.8	5.7	5.0	2	2	191
DTD.452.003	3.0	C 050 A	4.8 - 1.6	5.7 - 1.9	5.0 - 1.67	2	2	201
DTD.752.001	5.0	C 075 A	3.7	4.4	6.0	2	2	215
DTD.752.003	5.0	C 075 A	3.7 - 1.2	4.4 - 1.5	6.0 - 2.0	2	2	225
DTD.753.001	7.5	C 075 A	2.5	3.0	6.0	3	3	-
DTD.753.003	7.5	C 075 A	2.5 - 0.8	3.0 - 1.0	6.0 - 2.0	3	3	-
DTD.754.001	10	C 075 A	3.7	4.4	6.0 (2x)	-	4	-
DTD.754.003	10	C 075 A	3.7 - 1.2	4.4 - 1.5	6 - 2 (2x)	-	4	-
DTD.756.001	15	C 075 A	2.5	3.0	6.0 (2x)	-	6	-
DTD.756.003	15	C 075 A	2.5 - 0.8	3.0 - 1.0	6 - 2 (2x)	-	6	-
Afmetingen / Dimensions (mm)								
		A	B	C	D	E	F	G (I-Beam)
Hijsbereik naar keuze Hoisting height is optional (m)	0,25 / 0,5	516	215/255	264	494	225	160	75-200
	1,0	516	215/255	264	513	225	160	75-200
	1,0	664	229/269	256	605	225	160	75-200
	1,5	792	229/269	256	737	225	160	125-200
	2,0	792	229/269	256	694	225	160	125-200
	2,0	841	290/331	297	737	225	160	125-200
	2,5	967	310/360	297	802	225	160	150-300
	3,0	904	229/269	256	778	225	160	150-300
	3,0	1004	290/331	297	868	225	160	150-300
	5,0	1074	310/360	297	917	225	160	200-300
7,5/10/15 op aanvraag / on demand								